


Published: Oct 5, 2006

Parking Brake Control (70.35.08)

Removal

- 1 . Remove the floor console.
For additional information, refer to [Floor Console \(76.25.01\)](#).
- 2 .
Torque:
25 Nm

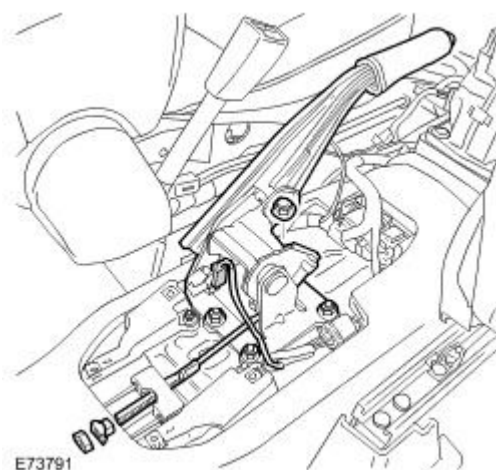

Installation

- 1 . To install, reverse the removal procedure.
- 2 . Adjust the parking brake.
For additional information, refer to [Parking Brake Cable Adjustment \(70.35.10\)](#).